

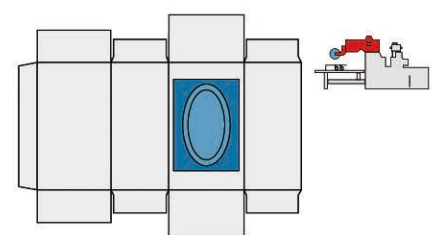


PRO-600


Smart Window Patching Machine




Notching & Creasing Unit
(Optional for RT1080 model)

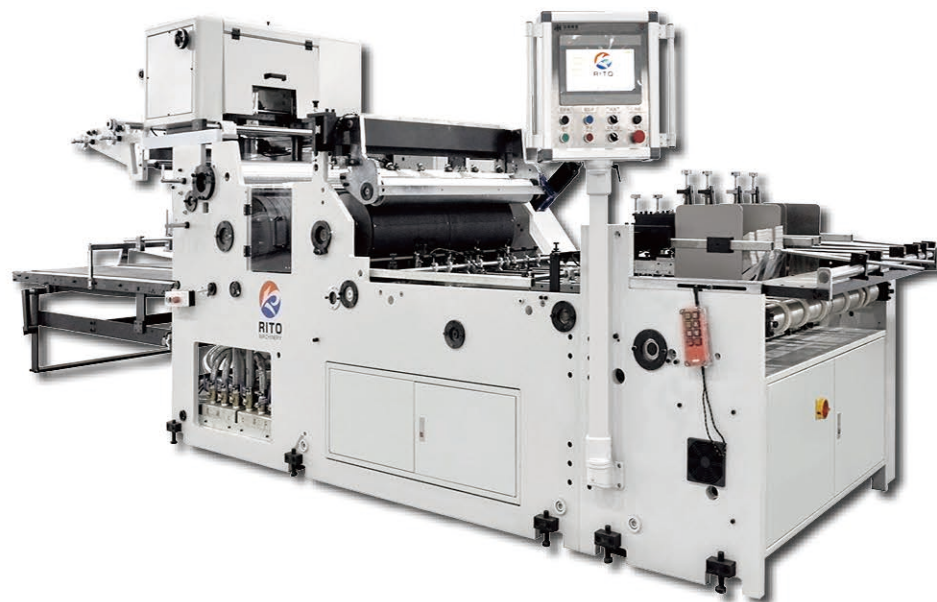


Window with shape perforation or shape cut

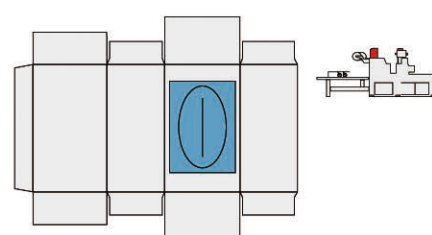

Window with intermittent cut

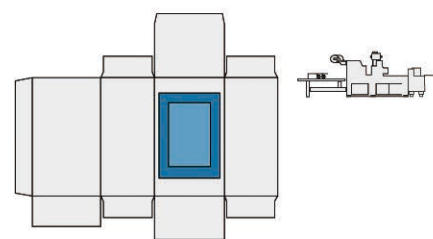

Folding box with normal window

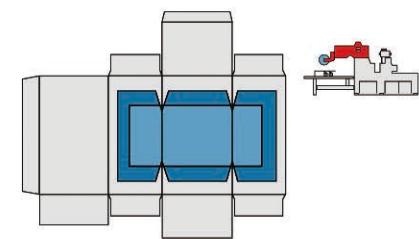

Window with pre-heated creasing
lengthwise and shaped die cut

Model	PRO-600	PRO-1100	ECO-1100
Max. sheet size	W520 × L600mm	W1100 × L920mm	W1000 × L710mm
Min. sheet size	W80 × L100mm	W80 × L100mm	W80 × L100mm
Max. window size	W400 × L400mm	W840 × L500mm	W840 × L500mm
Min. window size	W30 × L45mm	W30 × L45mm	W30 × L45mm
Paper thickness	cardboard: 200–2000 g/m ² corrugated board: 1–6mm	cardboard: 200–2000 g/m ² corrugated board: 1–6mm	cardboard: 200–2000 g/m ² corrugated board: 1–6mm
Film thickness	0.03–0.2mm	0.03–0.2mm	0.03–0.2mm
Accuracy	left/right ± 0.5mm top/bottom ± 1mm	left / right ± 0.5mm top / bottom ± 1mm	left / right ± 0.5mm top / bottom ± 1mm
Dimension(L × W × H)	4500 × 1500 × 1700mm	L4225 × W1700 × H1500mm	L4225 × W1700 × H1500mm
Weight	2800kg	3300kg	3300kg
Main motor power	3kw	3kw	3kw
Glue roller power	0.18kw	0.09kw	0.09kw
Delivery motor power	0.37kw	0.37kw	0.37kw
Machine Speed	About 10000 pcs/h	About 10000 pcs/h	About 10000 pcs/h
Double Max. sheet size	----	W1100 × L450mm	----
Double Speed	----	About 20000 pcs/h	----